

South Coast Correctional Centre Construction Waste Management Plan

SEPTEMBER 2016



**WASTE AUDIT AND
CONSULTANCY SERVICES**

Level 21 / 133 Castlereagh Street
Sydney, NSW 2000

Telephone (02) 9199 4521

www.wasteaudit.com.au

This report contains confidential information. It has been compiled by Waste Audit and Consultancy Services (Aust) Pty Ltd on behalf of Guymer Bailey Architects.

This Construction Waste Management Plan is not a substitute for legal advice on the relevant environmental legislation, which applies to Guymer Bailey Architects, its contractors or other bodies. Accordingly, Waste Audit and Consultancy Services (Aust) Pty Ltd will not be liable for any loss or damage that may arise out of this project, other than loss or damage caused as a direct result of Waste Audit and Consultancy Services (Aust) Pty Ltd's negligence.

Table of contents

Table of contents	2
1. Introduction	3
2. Waste Management Principles	5
Waste sources	6
Stormwater Pollution Prevention	7
Litter Management	8
Records	8
Asbestos	8
Waste/recyclables storage (on-site)	9
Waste/recyclables treatment (on-site)	9
3. Construction Materials	10
4. Hazardous Waste Materials	13
5. Contracts and purchasing	14
6. Training and Education	15

1. Introduction

This Construction Waste Management Plan has been prepared on behalf of Guymer Bailey Architects for the development South Coast Correctional Centre (SCCC) upgrade located in Nowra, NSW.

The development upgrade consists of:

- New 160 person maximum security section
- New 200 person minimum security section
- New industries facility/laundry
- Various upgrades and renovations to the facility

This Construction Waste Management Plan has been developed with consideration of Shoalhaven Council's Development Control Plan no 93 (*Controls for Waste Minimisation and Management*) and other Authority's requirements.

This Plan details the management of waste generated during the construction phases of the South Coast Correctional Centre Development.

The aim of this Plan is to ensure that all waste resulting from construction activities is managed in an effective, safe and environmentally aware manner. Specifically,

- To minimise the generation of waste to landfill
- To maximise waste material avoidance and reuse on site
- To ensure that where practicable, an efficient recycling procedure is applied to waste materials
- To raise awareness among employees and subcontractors of their waste management responsibilities

This Plan has been developed with reference to Shoalhaven Council's requirements and relevant Sections of the *Protection of the Environment Operations Act 1997* and the NSW Environment Protection Authority *Waste Classification Guidelines, Part 1: Classifying Waste*, as well as consideration of industry best-practice for this type of development.

While this is a construction waste management plan, there may be demolition activities that are undertaken during the construction. If so, then there will be compliance with *Australian Standard AS2601: The demolition of structures*. This in summary requires that the demolition of structures:


- sets out requirements for the planned demolition of buildings and certain other structures so that the risk of injury to workers, other site personnel and the public, and the risk of damage to adjacent property and the immediate environment is minimised;
- covers the methods and safety procedures applicable to demolition work in general as well as procedures for some types of structures;
- deals with manual and mechanical demolition techniques including those employing specialised earth-moving type machinery;
- includes informative appendices covering the demolition of pre-stressed concrete structures, some contractual considerations, a checklist for contractors and qualifications for site personnel;
- safety and health issues are addressed under the headings of:
 - Health and safety of the public - covering general requirements, lighting, falling materials, fencing, hoardings and warning notices, scaffolding, overhead protection for footpaths, and hazardous materials and conditions;
 - Safety and health of site personnel - covering general safety, personal protective clothing and equipment, cutting and welding, fire protection, first aid, amenities, removal of hazardous material and electrical safety;
 - Protection of adjoining buildings and protection of immediate environment - covering requirements relating to access and egress, damage and structural integrity, vibration and concussion, weatherproofing, burning, dust control, noise control, protection of public roads and protection of sewers and water courses; and
- protection of the site.

Adherence to AS2601 is required under the Environmental Planning and Assessment Regulation 2000.

Section 143 of the Protection of the Environment Operations Act 1997 requires waste to be transported to a place that can lawfully accept it. It will be the responsibility of the site developers to ensure all contractors clearly specify where all wastes are to be transported, the capacity of the nominated facilities to receive/manage the waste and to ensure that reports on management aspects (types, quantities and disposal pathways) are provided.

2. Waste Management Principles

The following waste hierarchy will be used as a guiding principle:

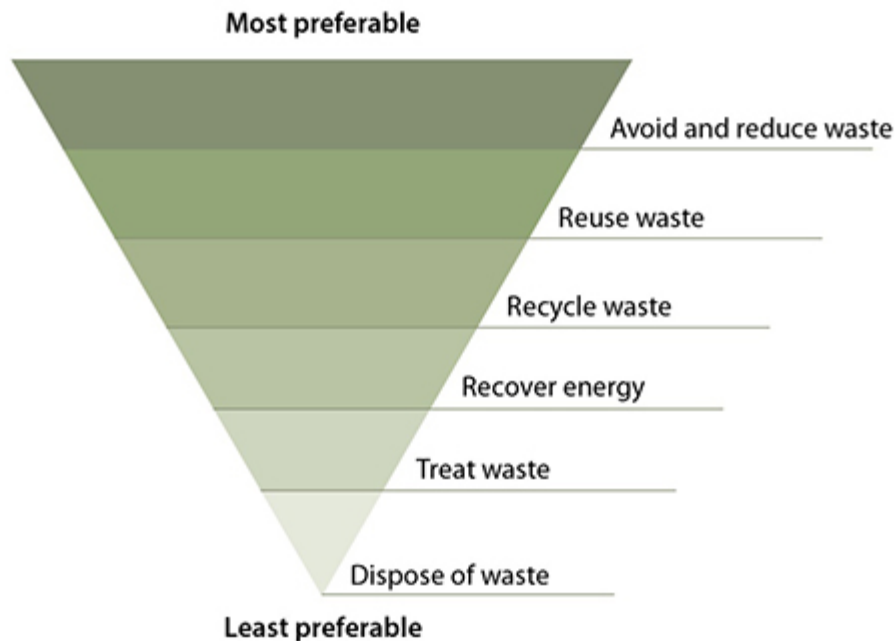

Avoid and Reduce

Minimise the production of waste materials in the construction process by:

- Assessing and taking into consideration the resultant waste from different design and construction options
- Purchasing materials that will result in less waste, which have minimal packaging, are pre-cut or fabricated.
- Not over ordering products and materials

Reuse

Ensure that where ever possible, materials are reused either on site or offsite.

- Identify all waste products that can be reused
- Put systems in place to separate and store reusable items
- Identify the potential applications for reuse both onsite and offsite and facilitate reuse

Recycling

Identify all recyclable waste products to be produced on site.

- Provide systems for separating and stockpiling of recyclables

- Provide clear signage to ensure recyclable materials are separated
- Process the material for recycling either onsite or offsite

Note: In some cases it may be more economical to send the unsorted waste to specialised waste contractors who will separate and recycle materials at an offsite location.

Disposal

Waste products which cannot be reused or recycled will be removed and disposed of. The following will need to be considered:

- Ensure the chosen waste disposal contractor complies with regulatory requirements
- Implement regular collection of bins

Waste sources

The principles outlined above are applied to the expected waste sources for the development as follows:

Excavation Material

Minor earthworks will be completed over the site as required to achieve proposed levels.

Green Waste

It is expected that there will be minimal green waste generated.

Bricks, Tiles, Concrete

Bricks will be stockpiled and reused wherever possible. Surplus, unused bricks may be reused in pavement construction or for temporary access tracks etc if possible. Unusable bricks will be collected and recycled at an appropriate brick/rubble recycling facility to be used in aggregate gravel products.

Timber

Recyclable timber (untreated) will be collected and recycled at appropriate timber yard. Unrecyclable (treated) timber will be disposed at landfill.

Timber that is not of the standard for reuse will be transported to a site for chipping for use as garden mulch if acceptable for this process.

Metals

All metal materials will be reused or recycled as follows:

- Metal drums and packaging to be returned to the supplier
- Any metal suitable for recycling will be separated and stored in a designated scrap metal bin for transport to a metal recycling facility

Paper and cardboard

Cardboard and paper will be produced mainly from packaging materials and office paper waste. These should be disposed of into a designated bin and collected regularly as required.

Liquid Waste

Liquid waste may be produced on site for environmental control measures such as:

- Site and vehicle cleaning
- Dust control waste

The following measures will be taken to minimise the impact of liquid waste:

- Ensure water is used in moderation and no taps are left continuously running
- Use any grey water produced on site for irrigation or for dust suppression
- Only discharge clean water into storm water

Stormwater Pollution Prevention

All actions will be undertaken to avoid pollution entering stormwater drains and for litter generation. The following will be initiated:

- i. Prior to commencement of any works a SWMS will be completed and reviewed to determine potential for stormwater pollution and/or litter generation
- ii. The proponent (contractor), will need to develop a management strategy to manage the potential for these issues to be realised
- iii. Site inspections will be conducted during the working day to monitor potential for stormwater generation and where identified, works will cease until appropriate controls are implemented
- iv. Waste water and storm water will be managed and disposed of in accordance with Sydney Water requirements.

Litter Management

- i. Daily site inspections will be conducted to identify litter, remedy the situation and investigate the cause so as to reduce the potential for the issue to occur in the future.
- ii. Sufficient quantities of bins (and/or bin space), will be made available so as to avoid dumping of materials outside bins
- iii. All waste/recycling bins will have covers so as to ensure that wastes cannot be blown out during windy conditions. This will also apply to relevant stocks of materials to be used in construction.
- iv. Personnel will be allocated the role of litter management in that they will periodically inspect the site and surrounds for litter and if identified collect and dispose of it.

Records

Records will be kept of all wastes and recyclables generated and either used on site, or transported off –site.

It will be a condition of appointment, that all waste/recycling contractors provide these records and that they also contain details of the facilities that the materials are transported to.

These records will be made available to Council on request.

Asbestos

It is not expected that any asbestos waste will be generated. However, should any materials be suspected of being (or containing), asbestos, the following process will apply.

The process for managing what has initially been suspected of being or containing asbestos waste is as follows¹:

- i. Treat the material as asbestos unless proven otherwise
- ii. Do not disturb the material (ie., shift or place into a container) at all
- iii. Seek advice from a suitably qualified laboratory to test the material(s) to determine if it is or is not asbestos.
- iv. If determined not to be asbestos, then it can be managed as an inert waste.

¹ It may be that any material suspected of being asbestos is simply classified as such, and then managed accordingly.

- v. If determined to be asbestos then managed by a licenced contractor for packaging, removal and disposal.
- vi. If the material has accidentally been uncovered, then the area should be cleared, barriers erected to prevent access, NSW WorkCover and EPA notified, and if broken, covered with a fine spray/mist of water.

For what has been conclusively identified as asbestos containing materials (including soils), a specialist/licenced asbestos contractor will be used. As required, only workers trained in asbestos removal techniques will be allowed to manage the removal of asbestos contaminated soil and any contained on the buildings.

In regards to disposal of asbestos containing materials, there are regulatory requirements under clause 42 of the Protection of the Environment Operations (Waste) Regulation 2005 that apply to the management of asbestos waste, including:

- Waste must be stored on the premises in an environmentally safe manner.
- Non-friable asbestos material must be securely packaged at all times.
- Friable asbestos material must be kept in a sealed container.
- Asbestos-contaminated soil must be wetted down.
- All asbestos waste must be transported in a covered, leak-proof vehicle.
- Asbestos waste must be disposed of at a landfill site that can lawfully receive this waste. Always contact the landfill beforehand to find out whether asbestos is accepted and any requirements for delivering asbestos to the landfill.
- It is illegal to dispose of asbestos waste in domestic garbage bins.
- It is also illegal to re-use, recycle or dump asbestos waste

These requirements will be adhered to.

Waste/recyclables storage (on-site)

All waste and recycling materials will be stored in bins provided by the appointed contractor(s). These bins will be appropriately coloured and signed to indicate what materials are to be deposited into them and located so as to maximise the recovery of reusable/recyclable materials.

Waste/recyclables treatment (on-site)

There will be no treatment of wastes or recyclables on-site except for possible removal of contaminants prior to forwarding to off-site recyclers.

3. Construction Materials

The following summarises the types, quantities and management systems for construction materials that may be generated during the civil works activities.

The quantity of waste materials to be generated onsite are estimates and therefore the systems that will be put in place need to incorporate flexibility to allow for variation in the total quantities generated. Active site management during the construction phase will ensure all waste/recyclable materials are disposed of appropriately and that all waste receptacles are of sufficient capacity to manage onsite activities.

Table 1 below details the estimated composition by m³ of construction waste to be generated for the total site.

Finalisation of the system(s) that will be implemented for the recovery of materials and for disposal of others to landfill will occur following appointment of contractor(s). A component of the appointment will be that contractors will be required to provide data as to the disposal pathway (eg., materials, volumes and final disposal site), as well as a validation process for this information.

The appointed contractor(s) will also be responsible for sourcing speciality recycling facilities for the materials that cannot be reused on site.

Based on the volume of materials estimated to be generated during construction activities, approximately 86% will be diverted from disposal at landfill.

Table 1: Waste management systems - construction

Materials on site			Destination	
Type of material	Estimated volume (m ³)	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling contractor)	Disposal (Detail contractor and landfill site)
Concrete	50m ³	No on-site use	Collected by contractor and disposed at concrete recycling facility	Facility TBA upon appointment of contractor

Materials on site			Destination	
Type of material	Estimated volume (m ³)	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling contractor)	Disposal (Detail contractor and landfill site)
Timber (formwork)	100m ³	Separated and where feasible, reused for further formwork	Unused material separate and stockpiled onsite. Collected by specialist timber subcontractor for recycling	Facility TBA upon appointment of contractor
Brick	30m ³	Undamaged bricks separated on site and stockpile for reuse at designated area or crushed and used in pavement construction	Unusable bricks collected by contractor and disposed at brick recycling facility	Facility TBA upon appointment of contractor
Plasterboard	40m ³	Unused material taken back by supplier for reuse where possible	Material to be separated and stockpiled onsite. Collected by the waste subcontractor on a weekly basis (or as required) for recycling. Possible use as soil improver with gypsum etc removed by recycler	Facility TBA upon appointment of contractor
Ferrous Metals (eg., balustrades, fittings, door frames, guttering, studs etc)	10m ³	No on-site reuse	Collected by specialist metal subcontractor for recycling	Facility TBA upon appointment of contractor
Non-Ferrous Metals (eg., wiring)	5m ³	No on-site reuse	Collected by specialist metal subcontractor for recycling	Facility TBA upon appointment of contractor

Materials on site			Destination	
Type of material	Estimated volume (m ³)	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling contractor)	Disposal (Detail contractor and landfill site)
Cladding	40m ³	No on-site reuse	Collected by the waste contractor for recycling. Facility TBA upon appointment of contractor.	Non-recyclable cladding will be collected by contractor and disposed at landfill
Glazing	2m ³	No on-site reuse	Recyclers consulted as to potential for recycling and if suitable separated for recycling by a facility (possibly as road base, but generally not accepted for recycling due to film in the glass)	Facility TBA upon appointment of contractor
Plastics (eg., plumbing fixtures)	5m ³	No on-site reuse	Contractor appointed to collect and recycle	No disposal to landfill
Mixed Recyclables	10m ³	No on-site reuse	Contractor appointed to collect and recycle	No disposal to landfill
General waste	50m ³	No on-site reuse	No recycling or reuse	Facility TBA upon appointment of contractor

4. Hazardous Waste Materials

At this stage, it is not expected that there will be any hazardous materials that will require management under this Waste Management Plan.

Contractors employed to manage any identified hazardous wastes will be required (prior to appointment), to demonstrate their compliance with NSW EPA and WorkCover requirements for management of the specific materials they are contracted to manage.

The key principles that need to be adhered to are²:

1. All hazardous wastes need to be correctly identified and managed in accord with all relevant legislation and Codes of Practices.
2. Hazardous materials need to be separated into their individual categories and not mixed with any other materials

Prior to commencing any clean-up activities, a Workplace Health & Safety Plan will be developed, implemented and monitored with all relevant site personnel receiving specific training in management of hazardous waste materials (including suspected hazardous materials).

² Reference should be made to the NSW EPA publication, Waste Classification Guidelines Part 1: Classifying Waste.

5. Contracts and purchasing

Each subcontractor working on the site will be required to adhere to this Waste Management Plan.

The Head Contractor will ensure each subcontractor:

- Takes practical measures to prevent waste being generated from their work
- Implements procedures to ensure waste resulting from their work will be actively managed and where possible recycled, as part of the overall site recycling strategy or separately as appropriate
- Ensures that the right quantities of materials are ordered, minimally packaged and where practical pre-fabricated. Any oversupplied materials are returned to the supplier
- Implements source separation of off cuts to facilitate reuse, resale or recycling.

The Site Manager will be responsible for:

- Ensuring there is a secure location for on-site storage of materials to be reused on site, and for separated materials for recycling off site.
- Engaging appropriate waste and recycling contractors to remove waste and recycling materials from the site
- Co-coordinating between subcontractors, to maximise on site reuse of materials
- Monitoring of bins on a regular basis by site supervisors to detect any contamination or leakage
- Ensuring the site has clear signs directing staff to the appropriate location for recycling and stockpiling station/s. And that each bin/skip/stockpile is clearly sign posted
- Providing training to all site employees and subcontractors in regards to the WMP as detailed in section 8 below.

Should a subcontractor cause a bin to be significantly contaminated, the Site Manager will be advised by a non-conformance report procedure. The offending subcontractor will then be required to take corrective action, at their own cost. The non-conformance process would be managed by the Head Contractors' Quality Management Systems.

6. Training and Education

All site employees and sub-contractors will be required to attend a site specific induction that will outline the components of the WMP and explain the site specific practicalities of the waste reduction and recycling strategies outlined in the WMP.

All employees are to have a clear understanding of which products are being reused/recycled on site and where they are stockpiled. They are also to be made aware of waste reduction efforts in regards to packaging.

The site manager will post educational signage in relation to the recycling activities on site in breakout areas, lunch rooms etc.